


Splice fittings

■ **SKR217** Adjustable contact wire splice fitting

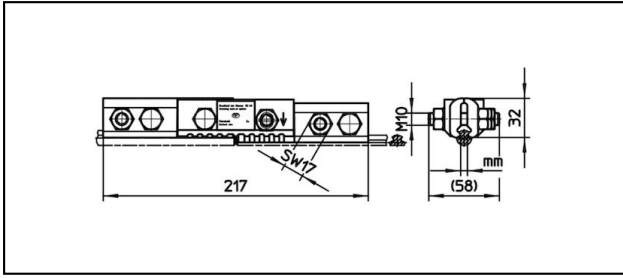

**Application**

Contact wire splice fitting adjustable for copper or copper alloy contact wire

**Characteristics**







Torque 50 Nm

**Material**

Clamping plates CuNiSi

**Legend**

- 1) With suspension lug
- 2) Special high tensile CuNiSi

Article-Nr.									
635.025.000	- 150	- 120	- 150	5.6 - 6.9				1.35	

Technical Specifications: **Adjustable contact wire splice fitting SKR217**

Article No.	635.025.000
<b>Starting torque</b>	50 N·m
<b>Contact wire section Cu</b>	- 150 mm <sup>2</sup>
<b>Contact wire section CuMg 0.2</b>	- 120 mm <sup>2</sup>
<b>Contact wire section CuAg</b>	- 150 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 - 6.9 mm
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.35 kg

