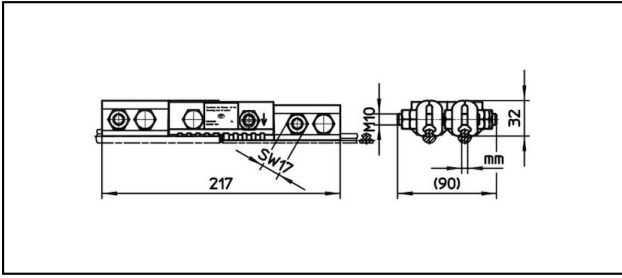


Splice fittings

■ **SKR217A** Adjustable contact wire splice fitting



Application






Contact wire splice fitting adjustable for copper or copper alloy contact wire

Characteristics

Torque 50 Nm
For 2 contact wires

Material

Clamping plates CuNiSi

Article-Nr.	 mm ²	 mm ²	 mm ²	 mm					 Kg
635.346.000	- 120	- 107	- 120	5.6 - 6.9					2.7

Technical Specifications: **Adjustable contact wire splice fitting SKR217A**

Article No.	635.346.000
Starting torque	50 N·m
Contact wire section Cu	- 120 mm ²
Contact wire section CuMg 0.2	- 107 mm ²
Contact wire section CuAg	- 120 mm ²
Contact wire groove	5.6 - 6.9 mm
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	2.7 kg

