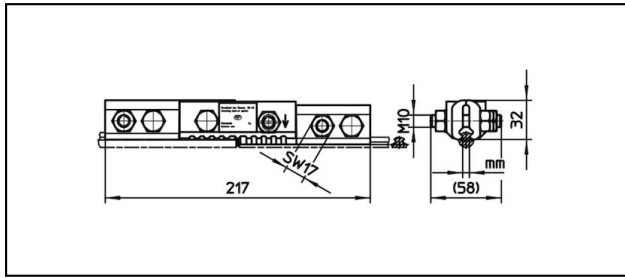


## Splice fittings

### ■ SKR217



#### Application

Contact wire splice fitting adjustable for copper or copper alloy contact wire

#### Characteristics







Torque 50 Nm

#### Material

Clamping plates CuNiSi

#### Legend

- 1) With suspension lug
- 2) Special high tensile CuNiSi

Article-Nr.	 mm <sup>2</sup>	 mm <sup>2</sup>	 mm <sup>2</sup>	 mm				 Kg	
635.166.000	- 150	- 150	- 150	5.6 - 6.9				1.45	2
635.166.001	- 150	- 150	- 150	8.5				1.5	2
635.043.000	- 150	- 120	- 150	3.75				1.35	
635.025.000	- 150	- 120	- 150	5.6 - 6.9				1.35	
635.349.000	- 150	- 120	- 150	5.6 - 6.9				1.4	1

Technical Specifications: **SKR217**

	635.166.000	635.166.001	635.043.000	635.025.000
<b>Starting torque</b>	50 N·m			
<b>Contact wire section Cu</b>	- 150 mm <sup>2</sup>			
<b>Contact wire section CuMg 0.2</b>	- 150 mm <sup>2</sup>		- 120 mm <sup>2</sup>	
<b>Contact wire section CuAg</b>	- 150 mm <sup>2</sup>			
<b>Contact wire groove</b>	5.6 - 6.9 mm			
Commercial specification				
<b>Customs number</b>	85359000			
<b>country of origin</b>	ZA*	CH		
Logistic specification				
<b>Kilo / piece</b>	1.45 kg	1.5 kg	1.35 kg	

	635.349.000
<b>Starting torque</b>	50 N·m
<b>Contact wire section Cu</b>	- 150 mm <sup>2</sup>
<b>Contact wire section CuMg 0.2</b>	- 120 mm <sup>2</sup>
<b>Contact wire section CuAg</b>	- 150 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 - 6.9 mm
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.4 kg

