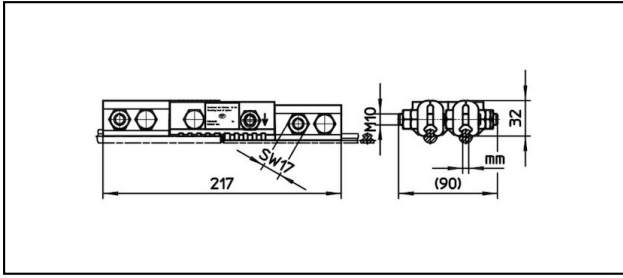


### Splice fittings

■ **SKR217A**



**Application**






Contact wire splice fitting adjustable for copper or copper alloy contact wire

**Characteristics**

Torque 50 Nm  
For 2 contact wires

**Material**

Clamping plates CuNiSi

Article-Nr.	 mm <sup>2</sup>	 mm <sup>2</sup>	 mm <sup>2</sup>	 mm					 Kg
635.346.000	- 120	- 107	- 120	5.6 - 6.9					2.7

Technical Specifications: **SKR217A**

	635.346.000
<b>Starting torque</b>	50 N·m
<b>Contact wire section Cu</b>	- 120 mm <sup>2</sup>
<b>Contact wire section CuMg 0.2</b>	- 107 mm <sup>2</sup>
<b>Contact wire section CuAg</b>	- 120 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 - 6.9 mm
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	2.7 kg

