


Splice fittings

■ **AK2FD2-58** 2 contact wire splice fitting

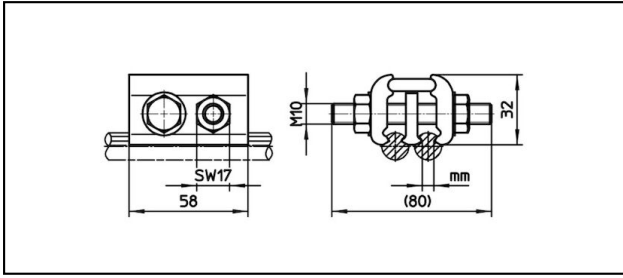

Application




2-contact-wire-splice fitting for copper or copper alloy contact wire

Characteristics

Torque 50 Nm
Not for full tension

Material

Clamping plates CuNiSi

| Article-Nr. |  mm² |  mm | | | | | | | |  Kg |
|-------------|---|--|--|--|--|--|--|--|--|--|
| 635.135.152 | 100 - 150 | 5.6 - 6.9 | | | | | | | | 0.5 |

Technical Specifications: **2 contact wire splice fitting AK2FD2-58**

| | |
|-----------------------------|---------------------------|
| Article No. | 635.135.152 |
| Starting torque | 50 N·m |
| Contact wire section | 100 - 150 mm ² |
| Contact wire groove | 5.6 - 6.9 mm |
| Commercial specification | |
| Customs number | 85359000 |
| country of origin | CH |
| Logistic specification | |
| Kilo / piece | 0.5 kg |

