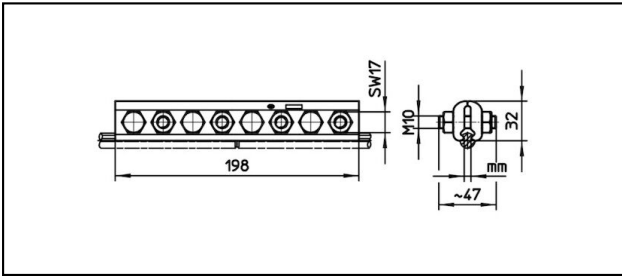
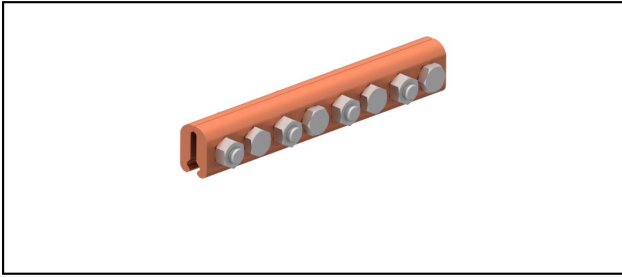


### Splice fittings

■ **SKF8-198** Splice fitting



**Application**






Contact wire splice fitting for copper or copper alloy contact wire

**Characteristics**

Torque 50 Nm

**Material**

Clamping plates CuNiSi

Article-Nr.									
635.039.000	- 193	- 150	- 150	5.6 - 6.9					1.17

Technical Specifications: **Splice fitting SKF8-198**

Article No.	635.039.000
<b>Starting torque</b>	50 N·m
<b>Contact wire section Cu</b>	- 193 mm <sup>2</sup>
<b>Contact wire section CuMg 0.2</b>	- 150 mm <sup>2</sup>
<b>Contact wire section CuAg</b>	- 150 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 - 6.9 mm
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.17 kg

