









## Conductor connections and junctions

### ■ AV 10 Crimping sleeve DIN

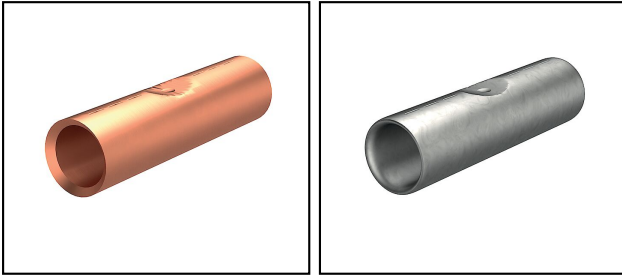

#### Characteristics

For hexagonal pressing

Article-Nr.	E-Number									
414.061.540	156 070 119	H	ok	Cu	12	8	35			25

## Technical Specifications: Crimping sleeve DIN AV 10

Article No.	414.061.540
Approved class H / N (EN 62561-1)	H
Suitable for use in soil	ok
Material	Cu
KZ size of insert for crimp tool	12
Wire diameter	8 mm
Nominal cross section conductor	35 mm <sup>2</sup>
Surface protection	blank
Nominal cross section	35 mm <sup>2</sup>
Useful for stranded conductors	Yes
Model	DIN-version
Number of branches	2
For pull protected connections	No
Sleeve form	Short
Suitable for solid cores	Yes
Voltage level	Up to 15 kV
Suitable for round section conductors	Yes
Oil stop/centre bar	No
Insulation	None
Type of connection	Percussion connector
Commercial specification	
Customs number	85389000
country of origin	CE*
Logistic specification	
VPE Weight	0.742 kg

