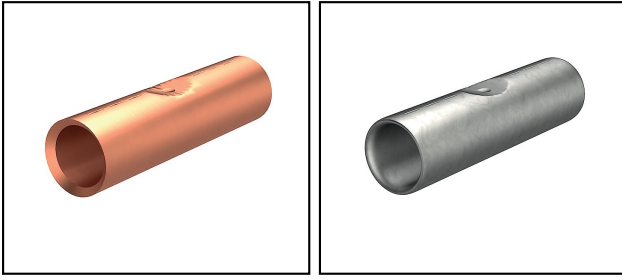









Conductor connections and junctions

■ AV 10 Crimping sleeve DIN



Characteristics
For hexagonal pressing

Article-Nr.	E-Number									
414.061.531	156 071 109	H		CuvSn	10	6	25			25

Technical Specifications: Crimping sleeve DIN AV 10

Article No.	414.061.531
Approved class H / N (EN 62561-1)	H
Material	CuvSn
KZ size of insert for crimp tool	10
Wire diameter	6 mm
Nominal cross section conductor	25 mm ²
Surface protection	Tinned
Nominal cross section	25 mm ²
Useful for stranded conductors	Yes
Model	DIN-version
Number of branches	2
For pull protected connections	No
Sleeve form	Short
Suitable for solid cores	Yes
Voltage level	Up to 230/380 V
Suitable for round conductors	Yes
Oil stop/centre bar	No
Insulation	None
Type of connection	Percussion connector
Commercial specification	
Customs number	85389000
country of origin	CE*
Logistic specification	
VPE Weight	0.458 kg

