









## Conductor connections and junctions

### ■ AV 12 Crimping sleeve T-form

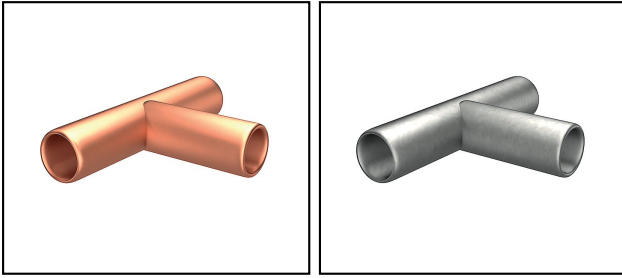

#### Characteristics

For hexagonal pressing

Article-Nr.	E-Number									
414.044.330	156 070 580	H	ok	CuvSn	12	8	35			25

## Technical Specifications: Crimping sleeve T-form AV 12

Article No.	414.044.330
Approved class H / N (EN 62561-1)	H
Suitable for use in soil	ok
Material	CuvSn
KZ size of insert for crimp tool	12
Wire diameter	8 mm
Nominal cross section conductor	35 mm <sup>2</sup>
Suitable for solid cores	Yes
Voltage level	Up to 15 kV
Number of branches	2
Model	Standard version
Nominal cross section	35 mm <sup>2</sup>
Useful for stranded conductors	Yes
Surface protection	Tinned
Sleeve form	Short
For pull protected connections	No
Suitable for round conductors	Yes
Type of connection	T-connector
Suitable for fine strand conductors	No
Insulation	None
Oil stop/centre bar	No
Commercial specification	
Customs number	85389000
country of origin	CE*
Logistic specification	
VPE Weight	1.354 kg

