









Conductor connections and junctions

■ AV 12 Crimping sleeve T-form

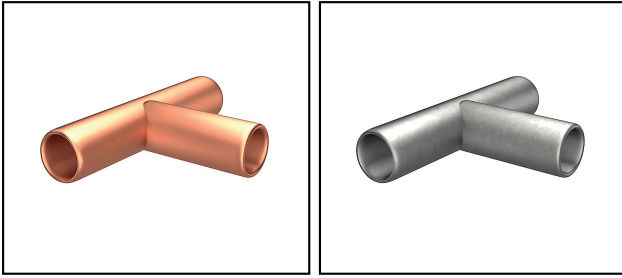

Characteristics

For hexagonal pressing

Article-Nr.	E-Number									
414.044.340	156 070 590		ok	CuVSn	14	10	50			25

Technical Specifications: Crimping sleeve T-form AV 12

Article No.	414.044.340
Suitable for use in soil	ok
Material	CuvSn
KZ size of insert for crimp tool	14
Wire diameter	10 mm
Nominal cross section conductor	50 mm ²
Suitable for solid cores	Yes
Voltage level	Up to 15 kV
Number of branches	2
Model	Standard version
Nominal cross section	50 mm ²
Useful for stranded conductors	Yes
Surface protection	Tinned
Sleeve form	Short
For pull protected connections	No
Suitable for round conductors	Yes
Type of connection	T-connector
Suitable for fine strand conductors	No
Insulation	None
Oil stop/centre bar	No
Commercial specification	
Customs number	85389000
country of origin	CE*
Logistic specification	
VPE Weight	2 kg

