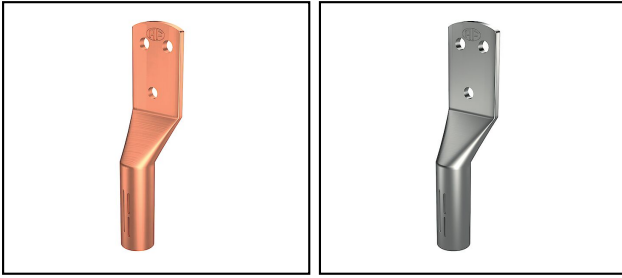








## Conductor connections and junctions

### ■ AV 14 Crimping wire lug, 3-hole



#### Characteristics

For hexagonal pressing

Article-Nr.	E-Number									
414.060.062	156 341 570	Cu	10	6	25	3x4.1				25
414.060.112	156 341 580	Cu	12	8	35	3x4.1				25
414.060.063	156 340 570	CuSn	10	6	25	3x4.1				25
414.060.113	156 340 580	CuSn	12	8	35	3x4.1				25

Technical Specifications: Crimping wire lug, 3-hole AV 14

	414.060.062	414.060.112	414.060.063	414.060.113
<b>Material</b>	Cu		CuvSn	
<b>KZ size of insert for crimp tool</b>	10	12	10	12
<b>Wire diameter</b>	6 mm	8 mm	6 mm	8 mm
<b>Nominal cross section conductor</b>	25 mm <sup>2</sup>	35 mm <sup>2</sup>	25 mm <sup>2</sup>	35 mm <sup>2</sup>
<b>Eyelet diameter</b>	3x4.1 mm			
<b>Connecting angle</b>	Straight			
<b>Surface protection</b>	blank		Tinned	
<b>Bolt dimension metric</b>	6	8	6	8
<b>Number of mounting holes</b>	3			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CE*			
<b>Logistic specification</b>				
<b>VPE Weight</b>	0.43 kg	0.8 kg	0.441 kg	0.723 kg

