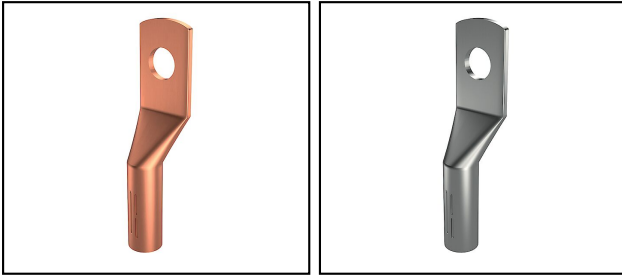









Crimping wire lug

■ AV 13 Crimping wire lug DIN



Characteristics
For hexagonal pressing

| Article-Nr. | E-Number |  |  |  |  |  |  | | |  |
|-------------|-------------|---|---|---|---|---|---|--|--|---|
| 414.060.101 | 156 341 260 | | CuvSn | 10 | 6 | 25 | 16 | | | 25 |

Technical Specifications: Crimping wire lug DIN AV 13

| | |
|----------------------------------|------------------------|
| Article No. | 414.060.101 |
| Material | CuVSn |
| KZ size of insert for crimp tool | 10 |
| Wire diameter | 6 mm |
| Nominal cross section conductor | 25 mm ² |
| Eyelet diameter | 16 mm |
| Bolt dimension metric | 16 |
| Nominal cross section | 25 mm ² |
| Number of mounting holes | 1 |
| Dimension A / diameter D1 | 21 - 7 mm ² |
| Dimension E L | 16 - 38 mmlmm |
| Number of pressings, narrowwide | 2 / - |
| Commercial specification | |
| Customs number | 85389000 |
| country of origin | CE* |
| Logistic specification | |
| VPE Weight | 0.475 kg |

