


Conductor connections and junctions








■ AV 5 Derivation clamp

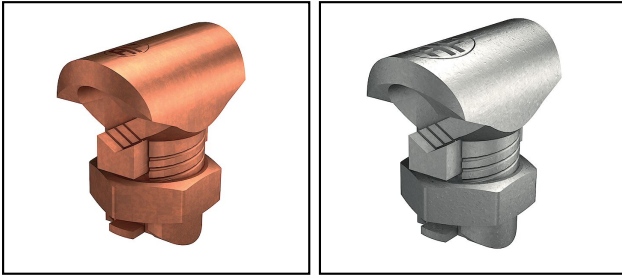

Legend

Rough contact areas, high mechanical stability

a) With security strips

Article-Nr.	E-Number									
125.166.606	156 216 090	H	ok	CuvSn		50				50

Technical Specifications: Derivation clamp AV 5

Article No.	125.166.606
Approved class H / N (EN 62561-1)	H
Suitable for use in soil	ok
Material	CuvSn
Nominal cross section conductor	50 mm ²
Nominal cross section branch conductor, SE/RE	25 - 50 mm ²
Nominal cross section main conductor, SM	50 mm ²
Clamping channel opening branch conductor	beidseitig offen
Type of connection	Screw connector
Material branch conductor	Kupfer
Clamping channel opening main conductor	beidseitig offen
Nominal cross section branch conductor, SM/RM	25 - 50 mm ²
Material main conductor	Kupfer
Terminal insulated	No
Nominal cross section main conductor, SE	50 mm ²
Surface protection	Tinned
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	3.873 kg

