


Cable dropper clamps

■ **SKT10**

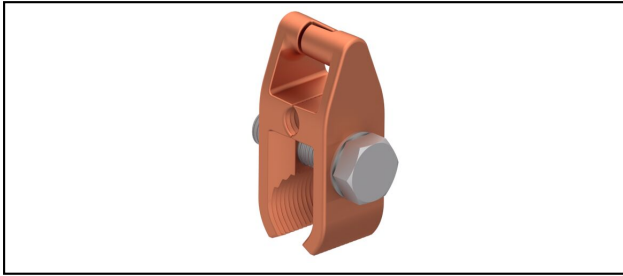

Application

For cable droppers, current feeding / non-current feeding


Characteristics






Torque 20-25 Nm

For thimble with 10 mm² dropper wire

Material

Corpus CuNiSi

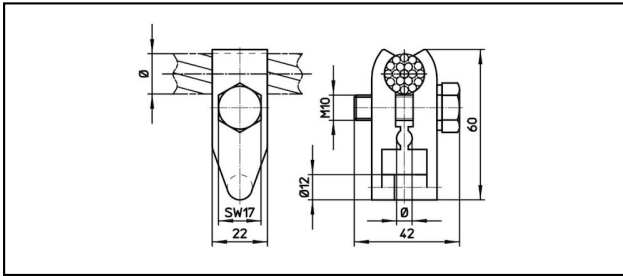

Article-Nr.									
690.066.000	14 - 18.5	120 - 202	4.5	10					0.16

Technical Specifications: **SKT10**

	690.066.000
Catenary wire diameter	14 - 18.5 mm
Catenary wire section	120 - 202 mm ²
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
	20 - 25 N·m
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.16 kg

