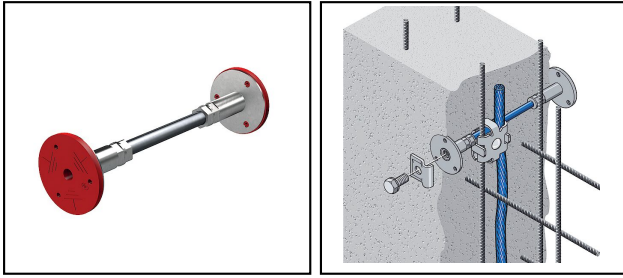





Foundation earthing components

■ FE 26 Earthing bushing



Characteristics

Other lengths on request

Article-Nr.	E-Number	kA/s (S)		mm a						
260.035.000	156 940 820	6	InoxA4	120	M10					25
260.037.000	156 940 830	6	InoxA4	150	M10					25
260.034.000	156 940 840	6	InoxA4	200	M10					25
260.043.000	156 940 870	6	InoxA4	250	M10					25
260.044.000	156 940 880	6	InoxA4	300	M10					25

Technical Specifications: Earthing bushing FE 26

	260.035.000	260.037.000	260.034.000	260.043.000
Short circuit current	6 kA/1s			
Material	InoxA4			
Length a	120 mm	150 mm	200 mm	250 mm
Internal thread	M10			
Length	120 mm	150 mm	200 mm	250 mm
Bolt dimension metric	10			
Diameter connection plate	50 mm			
Material connection lug	rostfreier Stahl (V4A)			
Connecting shaft	10 mm			
Commercial specification				
Customs number	85389000			
country of origin	CH			
Logistic specification				
VPE Weight	5.682 kg	6.133 kg	6.911 kg	7.7 kg

	260.044.000
Short circuit current	6 kA/1s
Material	InoxA4
Length a	300 mm
Internal thread	M10
Length	300 mm
Bolt dimension metric	10
Diameter connection plate	50 mm
Material connection lug	rostfreier Stahl (V4A)
Connecting shaft	10 mm
Commercial specification	
Customs number	85389000
country of origin	CH
Logistic specification	
VPE Weight	8.43 kg

