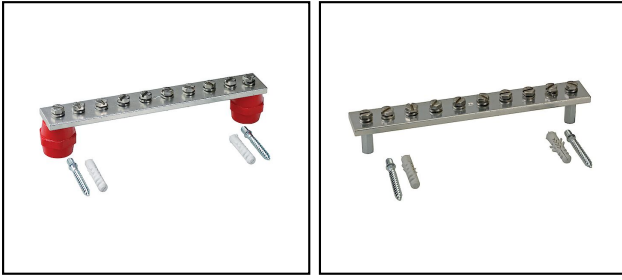











Equipotential rail 1-rowed

■ PA 25 Equipotential rail

**Legend**

- a) Including pin insulators
- b) Installation on DIN rail 35
- c) With spacer
- d) Thread in the connecting bar
- e) Installation on C-connecting bar

Article-Nr.	E-Number									
266.030.000	156 970 290	CuVSn		20xM10	40x8	815			a)	1

Technical Specifications: Equipotential rail PA 25

Article No.	266.030.000
Material	CuvSn
Internal thread	20xM10
Band size	40x8
Length a	815 mm
Number of connections conductor to 95 mm ² fixed	0
Construction type	Surface mounting fix
Material of clamp	Copper
Number of connections flat conductor 30 mm	0
Number of connections conductor to 25 mm ² fixed	0
Surface of the contact rail	Galvanic tinned
Number of connections round conductor 10 mm	0
Width	40 mm
Number of connections round conductor 8-10 mm	0
Insulator	Yes
Surface of the clamp	Galvanic tinned
Number of connections conductor to 16 mm ² fixed	0
Number of connections round conductor total	20
Number of connections flat conductor 40 mm	1
Number of connections conductor to 6 mm ² fixed	0
Model	Without covering cap
Number of connections round conductor 8 mm	0
Material of contact rail	Copper
Height	8 mm
comment	a)
Commercial specification	
Customs number	85389000
country of origin	CH
Texte	
comment	a)
Logistic specification	
VPE Weight	2.595 kg

