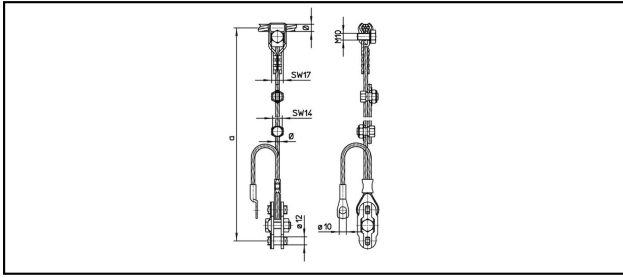


### Cable droppers

■ **SHT4/16WS** Feeding, adjustable



**Application**








Suspension for contact wire, current feeding

**Characteristics**

Other lengths and contact wire grooves on request

**Material**

Clamp and interlink CuNiSi / Cable Cu

Article-Nr.									
625.581.000	6.5 - 12.6	25 - 95	1400 - 1800	6	2	16			1.01

Technical Specifications: **Feeding, adjustable SHT4/16WS**

Article No.	625.581.000
<b>Catenary wire diameter</b>	6.5 - 12.6 mm
<b>Catenary wire section</b>	25 - 95 mm <sup>2</sup>
<b>Length a</b>	1400 - 1800 mm
<b>Dropper wire diameter</b>	6 mm
<b>Slipping force</b>	2 kN
<b>Dropper wire section</b>	16 mm <sup>2</sup>
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.01 kg

