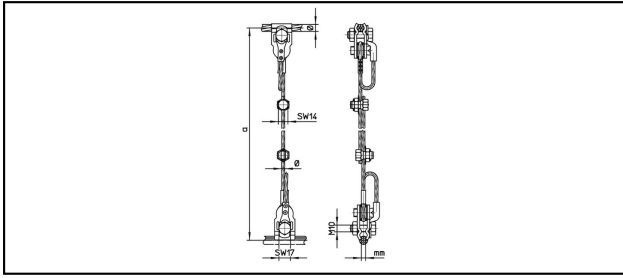


### Cable droppers

■ **SHTF1/10V** Feeding, adjustable



**Application**









Suspension for contact wire, current feeding

**Characteristics**

Other lengths and contact wire grooves on request

**Material**

Clamp CuNiSi / Wire Bz 2

Article-Nr.	 mm Ø	 mm	 mm Ø	 mm a	 mm Ø	 mm <sup>2</sup>	 kN	 Kg
625.154.596	9 - 12.5	50 - 95	3.75 - 8.5	750 - 1250	4.5	10	3	0.533

Technical Specifications: **Feeding, adjustable SHTF1/10V**

Article No.	625.154.596
<b>Length a</b>	750 - 1250 mm
<b>Catenary wire diameter</b>	9 - 12.5 mm
<b>Catenary wire section</b>	50 - 95 mm <sup>2</sup>
<b>Contact wire groove</b>	3.75 - 8.5 mm
<b>Dropper wire diameter</b>	4.5 mm
<b>Dropper wire section</b>	10 mm <sup>2</sup>
<b>Slipping force</b>	3 kN
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	0.533 kg

