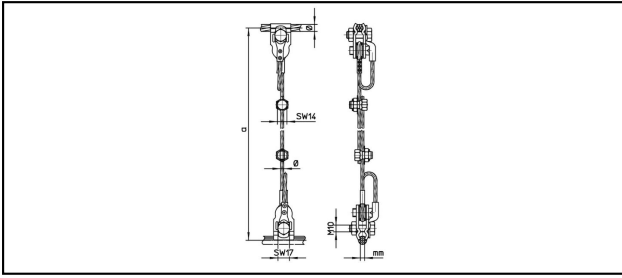


Cable droppers

■ **SHTF1/10V** Feeding, adjustable



Application









Suspension for contact wire, current feeding

Characteristics

Other lengths and contact wire grooves on request

Material

Clamp CuNiSi / Wire Bz 2

Article-Nr.	 mm Ø	 mm	 mm Ø	 mm	 mm Ø	 mm ²	 kN		 Kg
625.167.593	12.5 - 17.5	95 - 185	3.75 - 8.5	450 - 650	4.5	10	3		0.482

Technical Specifications: **Feeding, adjustable SHTF1/10V**

Article No.	625.167.593
Length a	450 - 650 mm
Catenary wire diameter	12.5 - 17.5 mm
Catenary wire section	95 - 185 mm ²
Contact wire groove	3.75 - 8.5 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3 kN
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.482 kg

