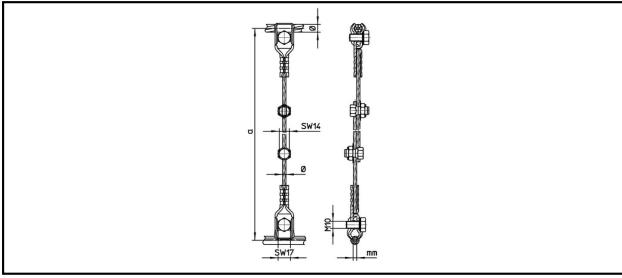


Cable droppers

■ **SHTF4/10V** Feeding, adjustable



Application









Suspension for contact wire, current feeding

Characteristics

Other lengths and contact wire grooves on request

Material

Clamp CuNiSi / Wire Bz 2

Article-Nr.									
625.513.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	4.5	10	3.5		0.428

Technical Specifications: **Feeding, adjustable SHTF4/10V**

Article No.	625.513.000
Length a	1350 - 1850 mm
Catenary wire diameter	6.5 - 12.5 mm
Catenary wire section	25 - 95 mm ²
Contact wire groove	3 - 8.5 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3.5 kN
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.428 kg

