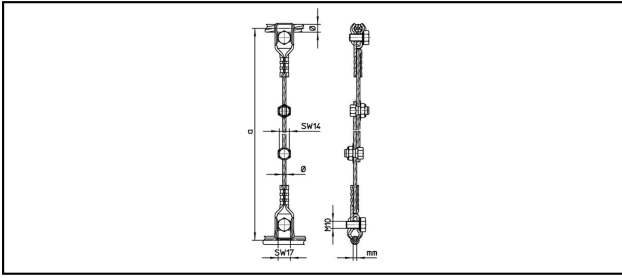


### Cable droppers

■ **SHTF4/10V** Feeding, adjustable



**Application**









Suspension for contact wire, current feeding

**Characteristics**

Other lengths and contact wire grooves on request

**Material**

Clamp CuNiSi / Wire Bz 2

Article-Nr.								
625.537.000	6.5 - 12.5	25 - 95	3 - 8.5	1950 - 2450	4.5	10	3.5	0.483



Technical Specifications: **Feeding, adjustable SHTF4/10V**

Article No.	625.537.000
<b>Length a</b>	1950 - 2450 mm
<b>Catenary wire diameter</b>	6.5 - 12.5 mm
<b>Catenary wire section</b>	25 - 95 mm <sup>2</sup>
<b>Contact wire groove</b>	3 - 8.5 mm
<b>Dropper wire diameter</b>	4.5 mm
<b>Dropper wire section</b>	10 mm <sup>2</sup>
<b>Slipping force</b>	3.5 kN
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	0.483 kg

