


### Cable droppers

■ **SHTF4/16V** Feeding, adjustable

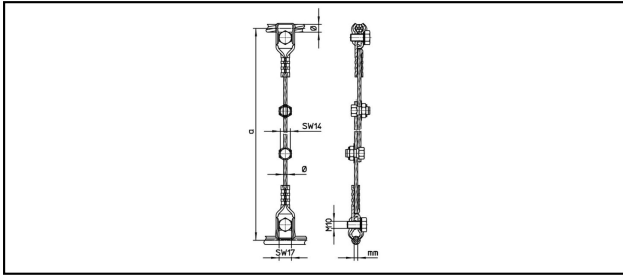

**Application**

Suspension for contact wire, current feeding

**Characteristics**










Other lengths and contact wire grooves on request

**Material**

Clamp CuNiSi / Wire Bz 2

**Legend**

- 1) Wire provided by customer
- 2) Wire Cu

Article-Nr.									
625.548.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	6	16	5	0.562	

Technical Specifications: **Feeding, adjustable SHTF4/16V**

Article No.	625.548.000
<b>Length a</b>	1350 - 1850 mm
<b>Slipping force</b>	5 kN
<b>Dropper wire diameter</b>	6 mm
<b>Catenary wire diameter</b>	6.5 - 12.5 mm
<b>Catenary wire section</b>	25 - 95 mm <sup>2</sup>
<b>Contact wire groove</b>	3 - 8.5 mm
<b>Dropper wire section</b>	16 mm <sup>2</sup>
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	0.562 kg

