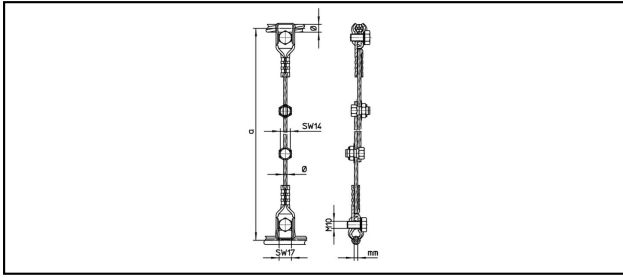


Cable droppers

■ **SHTF4/16V** Feeding, adjustable



Application

Suspension for contact wire, current feeding

Characteristics










Other lengths and contact wire grooves on request

Material

Clamp CuNiSi / Wire Bz 2

Legend

- 1) Wire provided by customer
- 2) Wire Cu

Article-Nr.	 mm Ø	 mm	 mm	 mm	 mm Ø	 mm ²	 kN	 Kg	
625.608.004	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	6	16	5	0.569	1

Technical Specifications: Feeding, adjustable SHTF4/16V

Article No.	625.608.004
Length a	1350 - 1850 mm
Slipping force	5 kN
Dropper wire diameter	6 mm
Catenary wire diameter	6.5 - 12.5 mm
Catenary wire section	25 - 95 mm ²
Contact wire groove	3 - 8.5 mm
Dropper wire section	16 mm ²
comment	
	1
Commercial specification	
Customs number	85359000
country of origin	ZA*
Texte	
comment	1
Logistic specification	
Kilo / piece	0.569 kg

