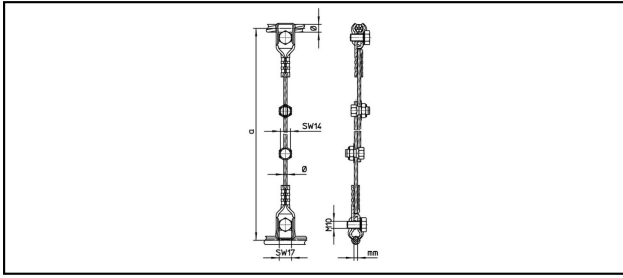










Cable droppers

■ **SHTF4/25V** Feeding, adjustable



Application
Suspension for contact wire, current feeding

Material
Clamp CuNiSi / Wire Bz 2

Article-Nr.								
625.561.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	7.5	25	5	0.844

Technical Specifications: **Feeding, adjustable SHTF4/25V**

Article No.	625.561.000
Length a	1350 - 1850 mm
Catenary wire diameter	6.5 - 12.5 mm
Catenary wire section	25 - 95 mm ²
Contact wire groove	3 - 8.5 mm
Dropper wire diameter	7.5 mm
Dropper wire section	25 mm ²
Slipping force	5 kN
Commercial specification	
Customs number	85359020
country of origin	CH
Logistic specification	
Kilo / piece	0.844 kg

