


## Various clamps

### ■ **FK3-80** Fixpoint clamp

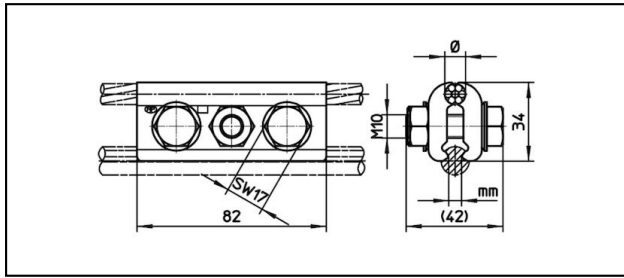

#### Application






For copper or copper alloy contact wire and fix point wire

#### Characteristics

Torque 50 Nm

#### Material

Clamping plates CuNiSi

Article-Nr.									
635.118.000	6	35	5.6	70 - 150					0.484
635.325.000	9	50	3.7 - 6.9	70 - 150					0.484

Technical Specifications: **Fixpoint clamp FK3-80**

	635.118.000	635.325.000
<b>Contact wire groove</b>	5.6 mm	3.7 - 6.9 mm
<b>Catenary wire diameter</b>	6 mm	9 mm
<b>Catenary wire section</b>	35 mm <sup>2</sup>	50 mm <sup>2</sup>
<b>Starting torque</b>	50 N·m	
<b>Contact wire section</b>	70 - 150 mm <sup>2</sup>	
Commercial specification		
<b>Customs number</b>	85359000	
<b>country of origin</b>	CH	
Logistic specification		
<b>Kilo / piece</b>	0.484 kg	

