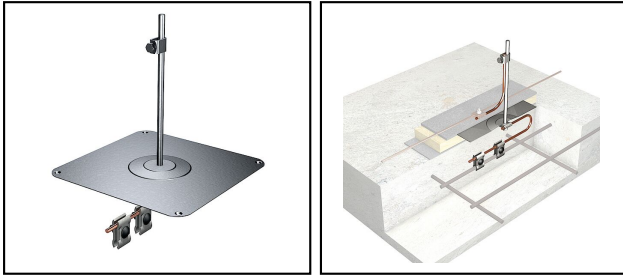


## Interception components

■ **FL 82** Flat roof lead through with wire Cu 8mm









**Characteristics**

For blankets of bituminous, mastic concrete or synthetic material, tablet (320x320mm) with rod welded incl. access clip

**Content**

Wire Cu d. 8mm, 650mm and 2 clamps FE 41

Article-Nr.	E-Number									
220.823.000	156 940 450	H	InoxA2	300	6 - 12	12				2

Technical Specifications: Flat roof lead through with wire Cu 8mm FL 82

	220.823.000
<b>Approved class H / N (EN 62561-1)</b>	H
<b>Material</b>	InoxA2
<b>Height H</b>	300 mm
<b>Wire diameter</b>	6 - 12 mm
<b>Surface protection</b>	unbehandelt
<b>Diameter D</b>	12 mm
<b>Type of accessory</b>	Dach-, Wand- und Erderdurchführung
Commercial specification	
<b>Customs number</b>	85389000
<b>country of origin</b>	CH
Logistic specification	
<b>VPE Weight</b>	5.054 kg

