


## Flexible cable droppers

### ■ SHP4 Flexible cable dropper

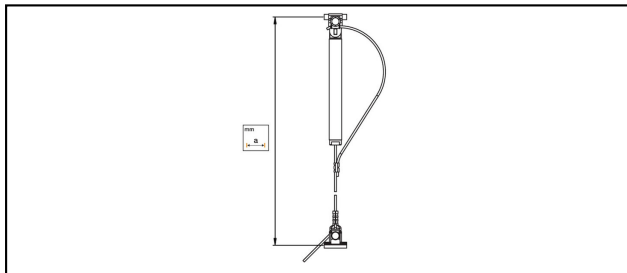

#### Application










Applicable for all types of AC and DC systems, Current feeding.

#### Characteristics

Increases the flexibility of the overhead contact system and reduces hard points  
Improves the contact quality of the pantograph at high speeds.

#### Material

CuNiSi

Article-Nr.									
625.622.010	SHP4/1	13 - 16	95 - 150	3 - 8.5	520 - 1600	4.5	10	3.5	1.05
625.622.011	SHP4/1	13 - 16	95 - 150	3 - 8.5	520 - 1600	6	16	3.5	1.05
625.622.020	SHPK4/1	13 - 16	95 - 150	3 - 8.5	450 - 600	4.5	10	3.5	0.95
625.622.030	SHP4/1	6.5 - 13	25 - 95	3 - 8.5	520 - 1600	4.5	10	3.5	1.05
625.622.040	SHP4/10	14 - 18.5	120 - 202	3 - 8.5	520 - 1600	4.5	10	3.5	1.15

Technical Specifications: Flexible cable dropper SHP4

	625.622.010	625.622.011	625.622.020	625.622.030
Rail product name	SHP4/1		SHPK4/1	SHP4/1
Catenary wire diameter	13 - 16 mm			6.5 - 13 mm
Catenary wire section	95 - 150 mm <sup>2</sup>			25 - 95 mm <sup>2</sup>
Contact wire groove	3 - 8.5 mm			
Length a	520 - 1600 mm		450 - 600 mm	520 - 1600 mm
Dropper wire diameter	4.5 mm	6 mm	4.5 mm	
Dropper wire section	10 mm <sup>2</sup>	16 mm <sup>2</sup>	10 mm <sup>2</sup>	
Slipping force	3.5 kN			
Commercial specification				
Customs number	85359000		0	85359000
country of origin	CH		undefined	CH
Logistic specification				
Kilo / piece	1.05 kg		0.95 kg	1.05 kg

	625.622.040
Rail product name	SHP4/10
Catenary wire diameter	14 - 18.5 mm
Catenary wire section	120 - 202 mm <sup>2</sup>
Contact wire groove	3 - 8.5 mm
Length a	520 - 1600 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm <sup>2</sup>
Slipping force	3.5 kN
Commercial specification	
Customs number	85359000
country of origin	undefined
Logistic specification	
Kilo / piece	1.15 kg

