
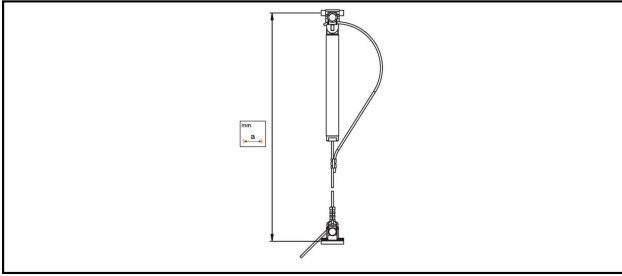


Flexible cable droppers

■ SHP4 Flexible Cable Dropper

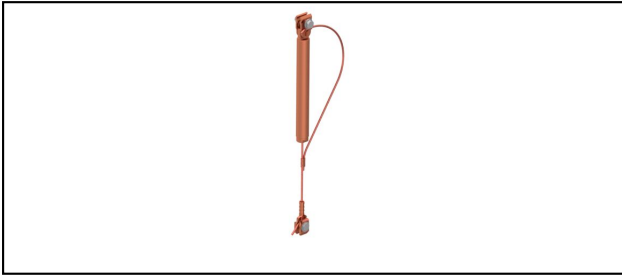

Application

Applicable for all types of AC and DC systems, Current feeding.

Characteristics

Increases the flexibility of the overhead contact system and reduces hard points
Improves the contact quality of the pantograph at high speeds.

Material

CuNiSi

Article-Nr.									
625.622.020	SHPK4/1	13 - 16	95 - 150	3 - 8.5	450 - 600	4.5	10	3.5	0.95

Technical Specifications: **Flexible Cable Dropper SHP4**

Article No.	625.622.020
Rail product name	SHPK4/1
Catenary wire diameter	13 - 16 mm
Catenary wire section	95 - 150 mm ²
Contact wire groove	3 - 8.5 mm
Length a	450 - 600 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3.5 kN
Commercial specification	
Customs number	0
country of origin	ZA*
Logistic specification	
Kilo / piece	0.95 kg

