


## Flexible cable droppers

### ■ SHP4 Flexible Cable Dropper

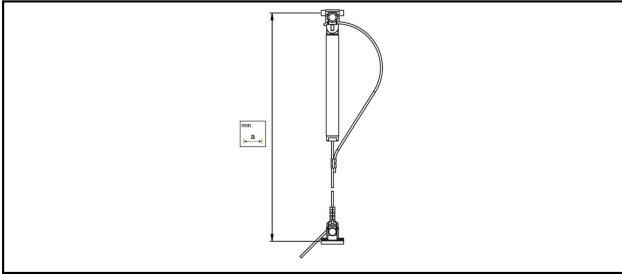

#### Application

Applicable for all types of AC and DC systems, Current feeding.

#### Characteristics

Increases the flexibility of the overhead contact system and reduces hard points  
Improves the contact quality of the pantograph at high speeds.

#### Material

CuNiSi

Article-Nr.									
625.622.030	SHP4/1	6.5 - 13	25 - 95	3 - 8.5	520 - 1600	4.5	10	3.5	1.05

Technical Specifications: **Flexible Cable Dropper SHP4**

Article No.	625.622.030
<b>Rail product name</b>	SHP4/1
<b>Catenary wire diameter</b>	6.5 - 13 mm
<b>Catenary wire section</b>	25 - 95 mm <sup>2</sup>
<b>Contact wire groove</b>	3 - 8.5 mm
<b>Length a</b>	520 - 1600 mm
<b>Dropper wire diameter</b>	4.5 mm
<b>Dropper wire section</b>	10 mm <sup>2</sup>
<b>Slipping force</b>	3.5 kN
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	CH
Logistic specification	
<b>Kilo / piece</b>	1.05 kg

