
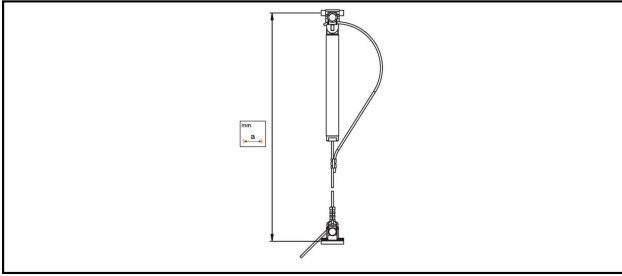


Flexible cable droppers

■ SHP4 Flexible Cable Dropper

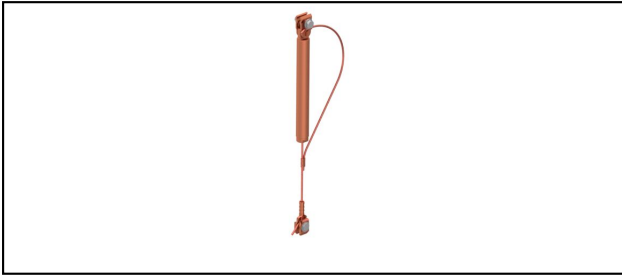

Application

Applicable for all types of AC and DC systems, Current feeding.

Characteristics

Increases the flexibility of the overhead contact system and reduces hard points
Improves the contact quality of the pantograph at high speeds.

Material

CuNiSi

Article-Nr.									
625.622.040	SHP4/10	14 - 18.5	120 - 202	3 - 8.5	520 - 1600	4.5	10	3.5	1.15

Technical Specifications: **Flexible Cable Dropper SHP4**

Article No.	625.622.040
Rail product name	SHP4/10
Catenary wire diameter	14 - 18.5 mm
Catenary wire section	120 - 202 mm ²
Contact wire groove	3 - 8.5 mm
Length a	520 - 1600 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	3.5 kN
Commercial specification	
Customs number	85359000
country of origin	ZA*
Logistic specification	
Kilo / piece	1.15 kg

