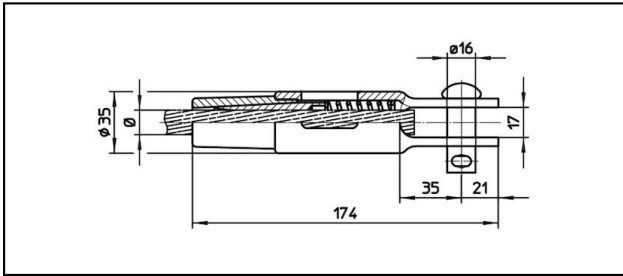
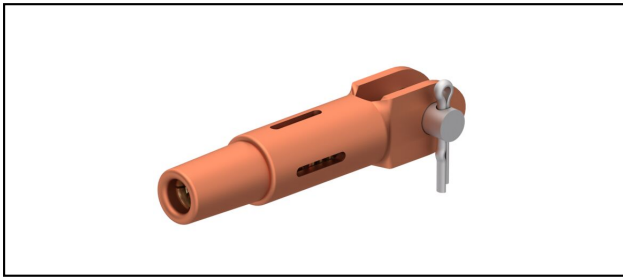


Forked collar sockets

■ GCK174/17

**Application**

Cu, Cu-steel or Bz tensioned cables






Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus CuNiSi / Collet AIBz resp. CuNiSi

Article-Nr.									
615.039.106	S120/FD150	14.5	120	14.5	150				0.73
615.040.105	S120	14	120						0.73
615.041.106	S150	15.8	150						0.72
615.054.105	FD120			13.2	120				0.73

Technical Specifications: **GCK174/17**

	615.039.106	615.040.105	615.041.106	615.054.105
Rail product name	S120/FD150	S120	S150	FD120
Catenary wire diameter	14.5 mm	14 mm	15.8 mm	
Catenary wire section	120 mm ²		150 mm ²	
Contact wire diameter	14.5 mm			13.2 mm
Contact wire section	150 mm ²			120 mm ²
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.73 kg		0.72 kg	0.73 kg

