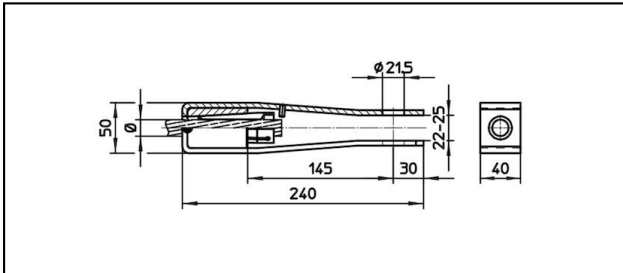


## Forked collar sockets

## ■ G150/40,21.5

**Application**

Tensioned Cu, Cu-Steel, steel or Bz cables

**Characteristics**

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

**Material**

Corpus stainless steel / Collet AlBz

**Legend**

1) With colour code

Article-Nr.	«N»	mm Ø	mm Ø	mm Ø	mm²			Kg	
610.019.106	S150	15.8	150					1.41	
610.063.000	S161	16.8	161					1.41	
610.072.000	S185	17.5	185					1.41	
610.061.000	S202	18.8	202					1.41	
610.069.000	S202	18.8	202					1.41	1
610.021.173	S240-250	21	240 - 250					1.41	
610.073.000	S161	16.8	161					1.41	1
610.079.000	FD193			16.8	193			1.41	1
610.082.000	S185	17.5	185					1.41	1

Technical Specifications: **GI50/40,21.5**

	610.019.106	610.063.000	610.072.000	610.061.000
<b>Rail product name</b>	S150	S161	S185	S202
<b>Catenary wire diameter</b>	15.8 mm	16.8 mm	17.5 mm	18.8 mm
<b>Catenary wire section</b>	150 mm <sup>2</sup>	161 mm <sup>2</sup>	185 mm <sup>2</sup>	202 mm <sup>2</sup>
<b>Contact wire diameter</b>				
<b>Contact wire section</b>				
Commercial specification				
<b>Customs number</b>	85359000		0	85359000
<b>country of origin</b>	CH		ZA*	CH
Logistic specification				
<b>Kilo / piece</b>	1.41 kg			

	610.069.000	610.021.173	610.073.000	610.079.000
<b>Rail product name</b>	S202	S240-250	S161	FD193
<b>Catenary wire diameter</b>	18.8 mm	21 mm	16.8 mm	
<b>Catenary wire section</b>	202 mm <sup>2</sup>	240 - 250 mm <sup>2</sup>	161 mm <sup>2</sup>	
<b>Contact wire diameter</b>				16.8 mm
<b>Contact wire section</b>				193 mm <sup>2</sup>
Commercial specification				
<b>Customs number</b>	85359000			
<b>country of origin</b>	CH			
Logistic specification				
<b>Kilo / piece</b>	1.41 kg			

	610.082.000
<b>Rail product name</b>	S185
<b>Catenary wire diameter</b>	17.5 mm
<b>Catenary wire section</b>	185 mm <sup>2</sup>
<b>Contact wire diameter</b>	
<b>Contact wire section</b>	
Commercial specification	
<b>Customs number</b>	85359000
<b>country of origin</b>	ZA*
Logistic specification	
<b>Kilo / piece</b>	1.41 kg

