
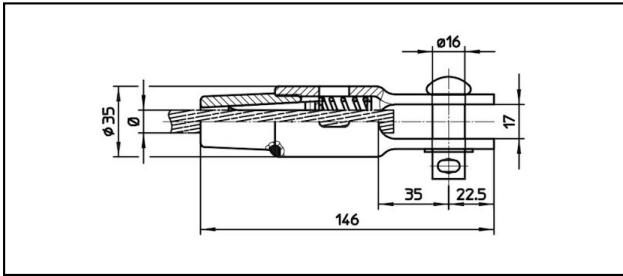


## Forked collar sockets

### ■ GCK146/17 Spc. Forked collar socket

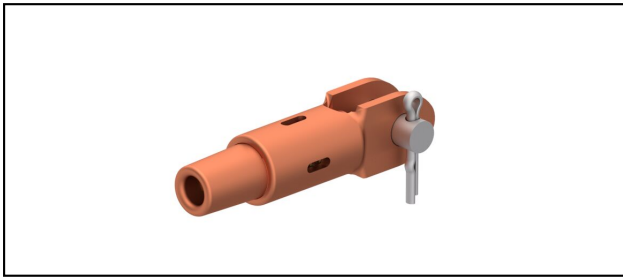

#### Application

Cu, Cu-steel or Bz tensioned cables

#### Characteristics

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

#### Material

Corpus CuNiSi / Collet AIBz resp. CuNiSi

#### Legend

1) With sealing and washer

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|--|--|---|---|
| 615.052.100 | 104   | 11.3  | 104   |   |   |  |  | 0.61  | 1   |

Technical Specifications: **Forked collar socket GCK146/17 Spc.**

|                               |                     |
|-------------------------------|---------------------|
| Article No.                   | 615.052.100         |
| <b>Rail product name</b>      | 104                 |
| <b>Catenary wire diameter</b> | 11.3 mm             |
| <b>Catenary wire section</b>  | 104 mm <sup>2</sup> |
| <b>comment</b>                | 1                   |
| Commercial specification      |                     |
| <b>Customs number</b>         | 85359000            |
| <b>country of origin</b>      | CH                  |
| Texte                         |                     |
| <b>comment</b>                | 1                   |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 0.61 kg             |

