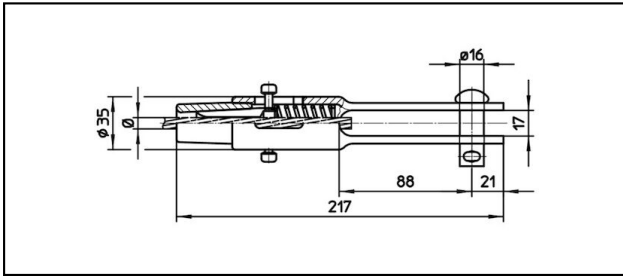
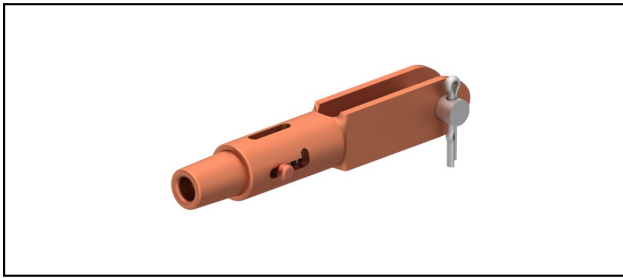


Forked collar sockets

■ **GCL217/17** Forked collar socket**Application**

Cu, Cu-steel, steel or Bz tensioned cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN








Material

Corpus CuNiSi / Collet AIBz resp. CuNiSi

Legend

1) Collet of stainless steel for steel cables

2) Without bolt \varnothing 16mm (bore \varnothing 16.75mm)

| Article-Nr. |  |  |  |  |  | | |  |  |
|-------------|---|---|---|---|---|--|--|---|---|
| 615.103.150 | S85 | 11.8 | 85 | | | | | 0.85 | |

Technical Specifications: **Forked collar socket GCL217/17**

| | |
|-------------------------------|--------------------|
| Article No. | 615.103.150 |
| Rail product name | S85 |
| Catenary wire diameter | 11.8 mm |
| Catenary wire section | 85 mm ² |
| Commercial specification | |
| Customs number | 85359000 |
| country of origin | CH |
| Logistic specification | |
| Kilo / piece | 0.85 kg |

