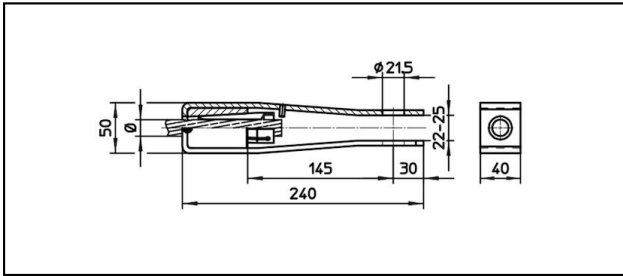


## Forked collar sockets

■ **GI50/40,21.5** Forked collar sockets**Application**

Tensioned Cu, Cu-Steel, steel or Bz cables

**Characteristics**

Service load min. 3 kN / max. 25 kN








Breaking load of corpus min. 80 kN

**Material**

Corpus stainless steel / Collet AlBz

**Legend**

1) With colour code

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|--|--|---|---|
| 610.072.000 | S185  | 17.5  | 185   |   |   |  |  | 1.41  |   |

Technical Specifications: **Forked collar sockets GI50/40,21.5**

|                               |                     |
|-------------------------------|---------------------|
| Article No.                   | 610.072.000         |
| <b>Rail product name</b>      | S185                |
| <b>Catenary wire diameter</b> | 17.5 mm             |
| <b>Catenary wire section</b>  | 185 mm <sup>2</sup> |
| Commercial specification      |                     |
| <b>Customs number</b>         | 0                   |
| <b>country of origin</b>      | undefined           |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 1.41 kg             |

