
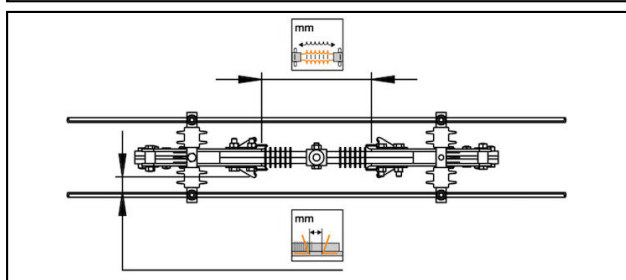
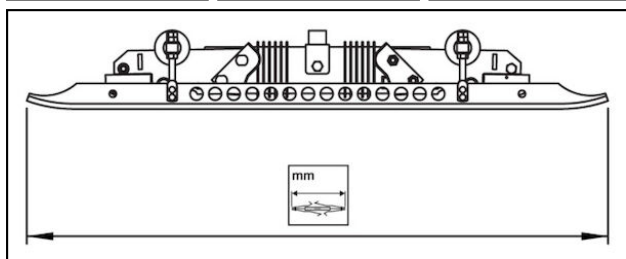
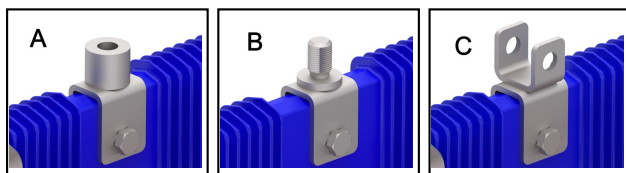


Section insulators

FTM1.5 Section insulator

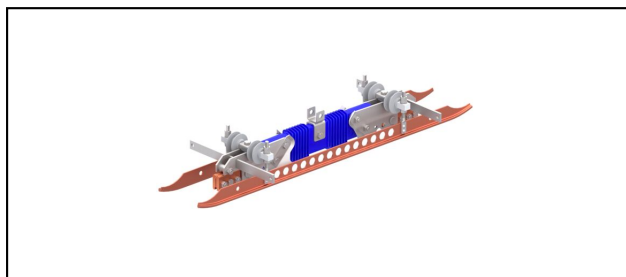

Application

Neutral section or section insulator for tramway and light rail
 Maximum speed up to 80 km/h
 With central suspension on insulator

Material

GRP/silicone, Cu, CuNiSi, stainless steel

Legend

- 1) Center suspension only
- 2) Center and standard suspension
- A) With threaded sleeve 5/8
- B) With threaded bolt M16
- C) With bracket for Ø 12" bolt 1

Article-Nr.										
655.300.036	80 - 150	5.6 - 6.9	370	610	435	35	1000	max.10	B, 2	

Accessories



Turnbuckle SSCH110-135

Article-Nr.									
695.002.671	110 - 135								0.192

Accessories



Turnbuckle SSCH95-125






Article-Nr.									
695.001.670	95 - 125								0.139



Accessories






Turnbuckle SSCH200-280

Article-Nr.	mm 	mm 	mm 					Kg 	
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Accessories



SAL

Article-Nr.		mm 						Kg 
696.016.010	Al	1610						1.2

Technical Specifications: **Section insulator FTM1.5**

Article No.	655.300.036
Contact wire section	80 - 150 mm ²
Contact wire groove	5.6 - 6.9 mm
Creeping distance	370 mm
Length between suspension	610 mm
Length between contact wire	435 mm
Arcing horn distance	35 mm
Total length	1000 mm
Recommended service load	max.10
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	80 kN
comment	
	B, 2
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	B, 2
Logistic specification	
Kilo / piece	11 kg

