


Section insulators

■ **LT3** Section insulator












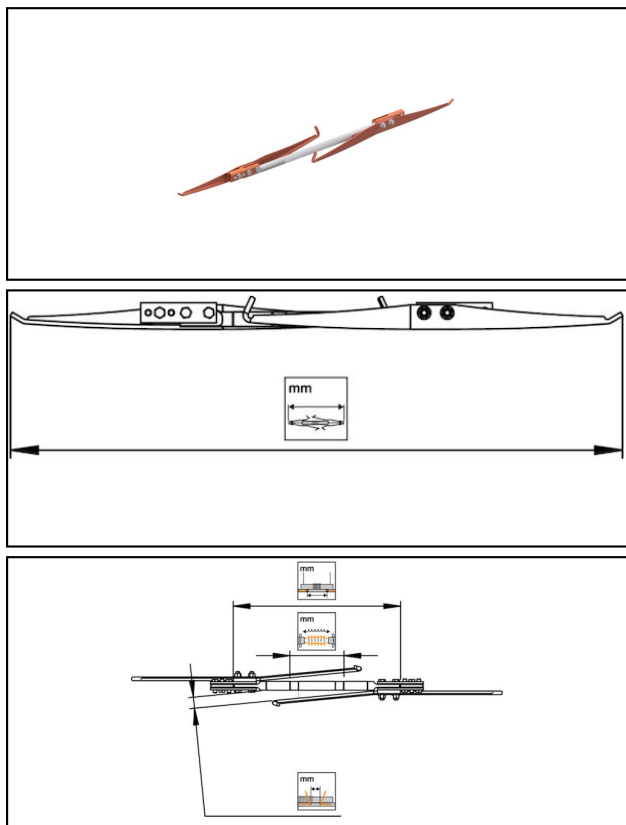


Application




For tramway and light rail
 Maximum speed up to 60 km/h
 Suspension is not necessary (optionally available)




Material

GRP/PTFE, Cu, CuNiSi, stainless steel

Article-Nr.									
655.266.301	80 - 150	6.9	300	320	650	80	1200	max.24	4.2

Accessories									
 Suspension for LT1 625.000.001									
Article-Nr.									
625.000.001								0.43	

Accessories									
 Turnbuckle SSCH110-135									
Article-Nr.									
695.002.671	110 - 135								0.192






Accessories									
 Turnbuckle SSCH95-125									
Article-Nr.									
695.001.670	95 - 125								0.139



Accessories



Turnbuckle SSCH200-280

Article-Nr.	mm 	mm 	mm 					Kg 	
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Technical Specifications: **Section insulator LT3**

Article No.	655.266.301
Contact wire section	80 - 150 mm ²
Contact wire groove	6.9 mm
Creeping distance	300 mm
Width between suspension	320 mm
Length between contact wire	650 mm
Arcing horn distance	80 mm
Total length	1200 mm
Recommended service load	max.24
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	60 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	4.2 kg

