


Generators combiner boxes

GAK 313-MC4 Junction box PV

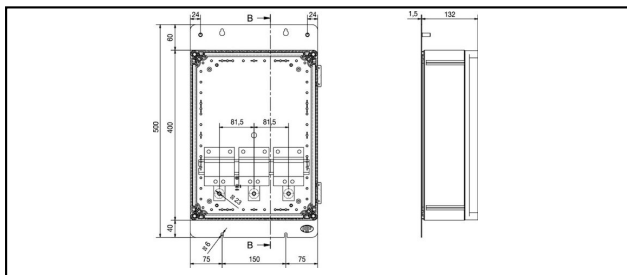

Characteristics

Generator boxes with preassembled surge protection and grounding plate:

Legend

- a) type 1+2 GAK + DIS 60 VGPVS-1000-6ST-3MPP
- b) type 1+2 GAK + DIS 50 PVS-1000-6ST-3MPP
- c) type 1+2 GAK + DIS 50 VGPVS-1000-6ST-3MPP
- d) type 2 GAK + DIS 50 PV-1000-6ST-3MPP

Article-Nr.	E-Number	Typ/Type	V U _C	kA I _{imp}	kA I _{max}	ns t _A	kV U _P	mm ²		
296.050.353	969 112 344	T1 / T2	≤1200VDC	12.5	40	≤25	2.8	6 - 35	a)	1
296.050.953	969 112 494	T1 / T2	≤1200VDC	6.25	40	≤25	2.6	2.5 - 25	b)	1
296.050.553	969 112 394	T1 / T2	≤1200VDC	6.25	40	≤25	2.8	2.5 - 25	c)	1
296.050.753	969 112 444	T2	≤1200VDC	5	40	≤25	2.6	2.5 - 25	d)	1

Technical Specifications: Junction box PV GAK 313-MC4

	296.050.353	296.050.953	296.050.553	296.050.753
SPD type	T1 / T2			T2
Number of poles	2			
max. discharge current (I _{max})	40 kA			
Nominal line voltage U _n DC	1000 V			
Impulse current [I _{imp}] (10/350)	12.5 kA	6.25 kA		5 kA
Discharge current max. (8/20) μs [I _{max}]	40 kA		60 kA	
Nominal discharge surge current (8/20)	20 kA	15 kA		15 kA
Voltage protection level [U _p]	2.8 kV	2.6 kV	2.8 kV	2.6 kV
Protection level max. (at 5kA)	2.1 kV			
Protection level max. (at 12.5kA)	2.3 kV			
Operation voltage max. [U _c]	≤1200VDC			
Operating current [I _c]	0 kA		0 kA	
Follow current [I _F]	0 kA			
follow current extinguishing capability [I _{fi}]	Unendlich kA eff		Unendlich kA eff	
Response time [t _a]	≤25 ns			
Short circuit resistance (I _{cw})	25 kA	1 kA	10 kA	1 kA
Fault indication	Mechanisch, Rot	mechanisch, Rot	Mechanisch, Rot	mechanisch, Rot
Temperature range	-40 - 85			
Total discharge current (8/20) (L N-PE)		60 kA		60 kA
Degree of protection	IP20			
Signaling on the device	Optic			
Signaling contact	Yes			
Connection cross section solid / stranded max.	1.5 mm ²			
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V / 0,5 A (AC) / - 30 V / 2 A (DC)	250 V / 0,5 A (AC) - 30 V / 2 A (DC)	250 V / 0,5 A (AC) / - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes			
System configuration DC	Yes			
Construction size	4 modular spacing	3 modular spacing		
Nominal discharge current [I _n]	20/Pol	15/Pol		
Nominal cross section conductor	6 - 35 mm ²	2.5 - 25 mm ²	2.5 - 25	2.5 - 25 mm ²
Integrated backup fuse	No			
Exhausting	No			
Mounting method	DIN rail (top hat rail) 35 mm			
Degree of protection (IP)	IP20			
Casing				
degree of protection	IP65			
number of modules	28			
contract rail	DIN-Schiene			
String / MPP	6ST-3MPP			
inputs PG / MC4	MC 4			
outputs PG / MC4	MC 4			
Ground base plate	Yes			
Switch				
Switching capacity voltage max. U _{oc} Max.	1000 V			
Switching current max. I _{sc} Max.	30 A			
Cross-sectional area	6 mm ²			
Standards				
Test standards USA	UL 1449 ed.3			
Test standards Europe	FprEN 50539-11	EN 50539-11		
Homologation	VDE, ÖVE und UL		VDE, ÖVE und UL	
Test standards France	UTE C61-740-51			
Commercial specification				
Customs number	85372000			
country of origin	CH			