

## Generators combiner boxes

### GAK 410-MC4 Junction box PVGAK+60VG-1000-4ST-4MPP MC4




#### Characteristics

Generator boxes with preassembled surge protection and grounding plate:

#### Legend

- a) type 1+2 GAK + 60 VGPVS-1000-4ST-4MPP
- b) type 1+2 GAK + 50 PVS-1000-4ST-4MPP
- c) type 1+2 GAK + 50 VGPVS-1000-4ST-4MPP
- d) type 2 GAK + 50 PV-1000-4ST-4MPP

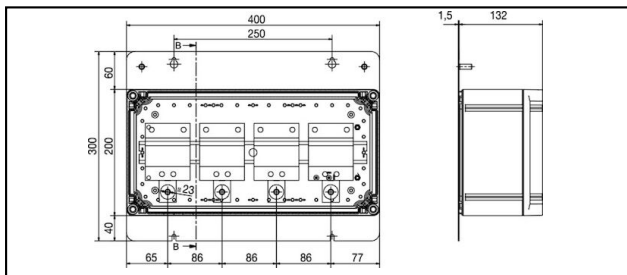

Article-Nr.	E-Number	Typ/Type	V U <sub>C</sub>	kA I <sub>imp</sub>	kA I <sub>max</sub>	mm <sup>2</sup>	kV U <sub>P</sub>	ns t <sub>A</sub>		
296.050.254	969 112 064	T1 / T2	≤1200VDC	12.5	40	6 - 35	2.8	≤25	a)	1

## Technical Specifications: Junction box PVGAK+60VG-1000-4ST-4MPP MC4 GAK 410-MC4

Article No.	296.050.254
SPD type	T1 / T2
Number of poles	2
max. discharge current (I <sub>max</sub> )	40 kA
Nominal line voltage U <sub>n</sub> DC	1000 V
Impulse current [I <sub>imp</sub> ] (10/350)	12.5 kA
Discharge current max. (8/20) μs [I <sub>max</sub> ]	40 kA
Nominal discharge surge current (8/20)	20 kA
Voltage protection level [U <sub>p</sub> ]	2.8 kV
Protection level max. (at 5kA)	2.1 kV
Protection level max. (at 12.5kA)	2.3 kV
Operation voltage max. [U <sub>c</sub> ]	≤1200VDC
Operating current [I <sub>c</sub> ]	0 kA
Follow current [I <sub>F</sub> ]	0 kA
follow current extinguishing capability [I <sub>fi</sub> ]	Unendlich
Response time [t <sub>a</sub> ]	≤25
Short circuit resistance (I <sub>cw</sub> )	25 kA
Fault indication	Mechanisch, Rot
Temperature range	-40 - 85
Degree of protection	IP20
Signaling on the device	Optic
Signaling contact	Yes
Connection cross section solid / stranded max.	1.5 mm <sup>2</sup>
Switching capacity signaling contact	250 V / 0,5 A (AC) - 30 V / 2 A (DC)
Energetically coordinated protective effect to the terminal	Yes
System configuration DC	Yes
Construction size	4 modular spacing
Nominal discharge current [I <sub>n</sub> ]	20/Pol
Nominal cross section conductor	6 - 35 mm <sup>2</sup>
Integrated backup fuse	No
Exhausting	No
Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20
<b>Casing</b>	
degree of protection	IP65
number of modules	20
contract rail	DIN-Schiene
String / MPP	4ST-4MPP
inputs PG / MC4	MC 4
outputs PG / MC4	MC 4
Ground base plate	Yes
<b>Standards</b>	
Test standards USA	UL 1449 ed.3
Test standards Europe	FprEN 50539-11
Test standards France	UTE C61-740-51
Homologation	VDE, ÖVE und UL
comment	a)
<b>Commercial specification</b>	
Customs number	85372000
country of origin	CH
<b>Texte</b>	
comment	a)
<b>Logistic specification</b>	
VPE Weight	6.37 kg