


## Down-conductor components

### AL 60 Lightning protection measurements




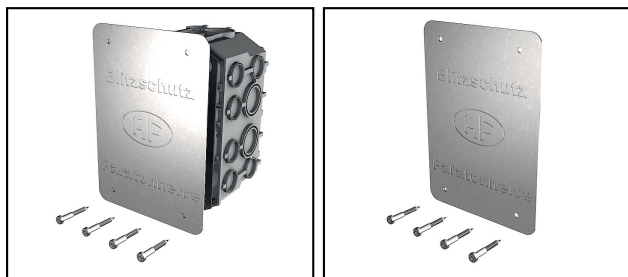

#### Characteristics

For isolated facing  
 Eruption site for protective sleeve Ø 20mm  
 Splashproof cover with neoprene gasket. Fastener with four cross recessed screws

#### Legend

- a) Set complete incl. box, cover and 4 screws
- b) Cover and 4 screws

Article-Nr.	E-Number		mm a	mm b	mm c					
276.030.000	155 170 305	InoxA2	115	95	170				a)	1
270.002.001	155 970 305	InoxA2	130		185				b)	1

Technical Specifications: **Lightning protection measurements AL 60**

	276.030.000	270.002.001
<b>Material</b>	InoxA2	
<b>Length a</b>	115 mm	130 mm
<b>Width b</b>	95 mm	
<b>Height c</b>	170 mm	185 mm
<b>Length</b>	170 mm	185 mm
<b>Width</b>	115 mm	130 mm
<b>Model</b>	Other	Signalling cover
<b>Housing feed-through by break-out opening</b>	Yes	
<b>Sealable</b>	No	
<b>Equipped with</b>	None	
<b>For tubediameter</b>	20/25 mm	
<b>Colour</b>	Grey	Other
<b>Surface protection</b>	unbehandelt	
<b>Type of fastening</b>		Cover for screw mounting
<b>With screening</b>	No	
<b>For box-/housing width</b>		115 mm
<b>Depth</b>	95 mm	
<b>With screws</b>		Yes
<b>Mounting method</b>	Flush mounted (plaster)	
<b>Shape</b>	Rectangular	Square
<b>Cover plate</b>	Not transparent	
<b>Construction type</b>	Device connection box (round/square)	
<b>For box-/housing length</b>		170 mm
<b>Wind proof</b>	No	
<b>Halogen free</b>	Yes	
<b>Cover attachment</b>	Bolted	
<b>Number of inlets</b>	2	
<b>Commercial specification</b>		
<b>Customs number</b>	73262000	
<b>country of origin</b>	CH	
<b>Logistic specification</b>		
<b>VPE Weight</b>	0.578 kg	0.23 kg