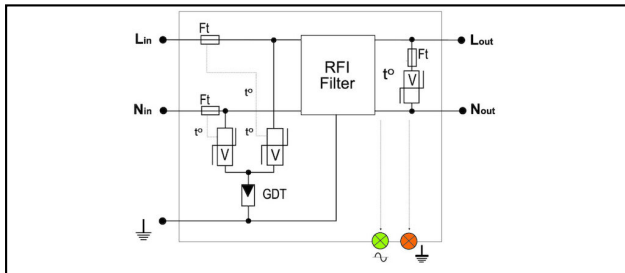


Surge protection (Type 3)

■ **CSCH** Multiple socket outlet**Characteristics**

Equipment protection devices for the 230 Volt hedge. Varistor and gas tube technology. The equipments CS HF have an additional high-frequency interference filter, which takes low-energy disturbances of the network. During overcharge the varistors will be cut off and the indicator light extinguishes. The supply voltage persists.

Article-Nr.	E-Number	Typ/Type	kA I_{max}	ns t_A	kV U_P	kA I_n				
296.060.004	986 690 107	T3	5	≤ 20	1.5	2.5			4	1

Technical Specifications: **Multiple socket outlet CSCH**

Article No.	296.060.004
SPD type	T3
max. discharge current (I _{max})	5 kA
Nominal line voltage U _n AC	230 V
Continuous voltage AC max.	255 V
Nominal discharge surge current (8/20)	2.5 kA
Nominal load current	10 A
Voltage protection level [U _p]	1.5 kV
Response time [t _a]	≤20
Fault indication	Trennung vom Stromkreis
Degree of protection	IP20
Signaling on the device	Optic
System configuration	TN-S
On/Off switch	Yes
Number of socket outlets with earth pin	4
Degree of protection (IP)	IP20
Voltage protection level max. (by I _n) [U _p]	<1.5
Surface protection	unbehandelt
Colour	Aluminium
Material quality	Aluminium
Housing shape	Rectangular
Residual current circuit breaker (RCCB)	No
Nominal discharge current [I _n]	2.5
Halogen free	Yes
Nominal current	10 A
Length of power cord	1.4 m
Surge protection DLU-06D3	Yes
Surface finishing	Matt
Load current max. [I _L]	16 kA
comment	4
Commercial specification	
Customs number	85363000
country of origin	ZA*
Texte	
comment	4
Logistic specification	
VPE Weight	0.588 kg