


Up to 25 kV

■ **LTN25** Neutral section

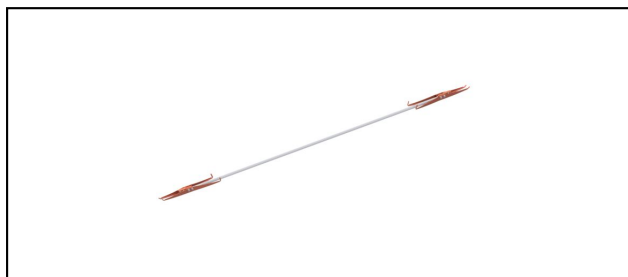

**Application**



Neutral section to separate different electrical phases or systems  
 For tramway and light rail  
 Maximum speed up to 60 km/h








**Characteristics**

Suspension is not necessary (optionally available)

**Material**

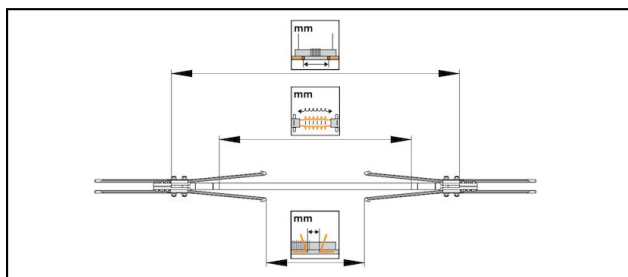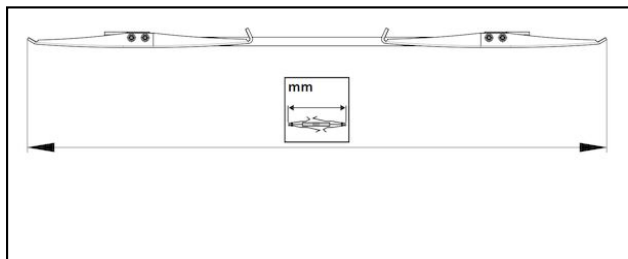GRP/PTFE, Cu, CuNiSi, stainless steel





| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|--|--|--|---|
| 655.266.057 | 2500  | 2850  | 320   | 2169  | 3408  | max.24   |  |  | 8.2   |

**Accessories**



**Suspension for LT1 625.000.001**

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|--|--|--|--|--|--|--|---|---|
| 625.000.001 |  |  |  |  |  |  |  | 0.43  |   |



Technical Specifications: **Neutral section LTN25**

|                                    |             |
|------------------------------------|-------------|
| Article No.                        | 655.266.057 |
| <b>Creeping distance</b>           | 2500 mm     |
| <b>Length between contact wire</b> | 2850 mm     |
| <b>Arcing horn distance</b>        | 2169 mm     |
| <b>Total length</b>                | 3408 mm     |
| <b>Width between suspension</b>    | 320 mm      |
| <b>Recommended service load</b>    | max.24      |
| Commercial specification           |             |
| <b>country of origin</b>           | ZA*         |
| Logistic specification             |             |
| <b>Kilo / piece</b>                | 8.2 kg      |

