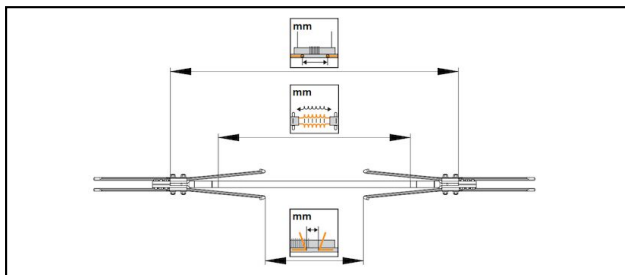
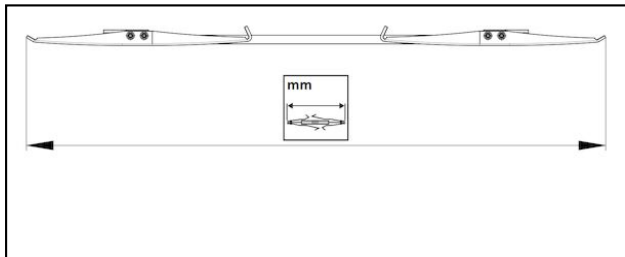


## Up to 3 kV

■ **LTN3** Neutral section**Application**

Neutral section to separate different electrical phases or systems  
For tramway and light rail  
Maximum speed up to 60 km/h

**Characteristics**









Suspension is not necessary (optionally available)

**Material**

GRP/PTFE, Cu, CuNiSi, stainless steel



**Legend**

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.050	700	1050	357	1610	320	max.24		5.8	1

**Accessories**

**Suspension for LT1 625.000.001**

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **Neutral section LTN3**

Article No.	655.266.050
<b>Contact wire section</b>	80 - 150 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 mm
<b>Creeping distance</b>	700 mm
<b>Length between contact wire</b>	1050 mm
<b>Arcing horn distance</b>	357 mm
<b>Total length</b>	1610 mm
<b>Width between suspension</b>	320 mm
<b>Recommended service load</b>	max.24
<b>Specified mechanical load (SML)</b>	80 kN
<b>comment</b>	1
Commercial specification	
<b>Customs number</b>	0
<b>country of origin</b>	ZA*
Texte	
<b>comment</b>	1
Logistic specification	
<b>Kilo / piece</b>	5.8 kg