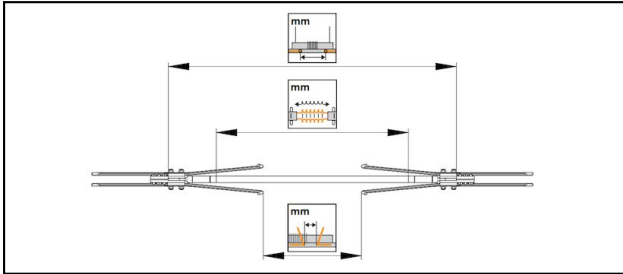
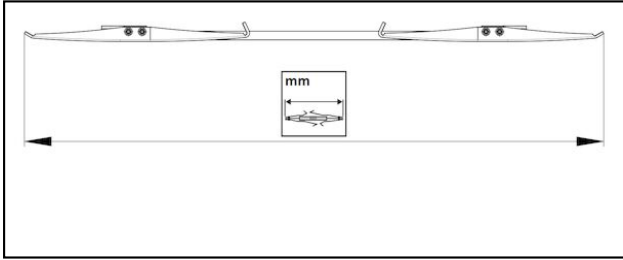
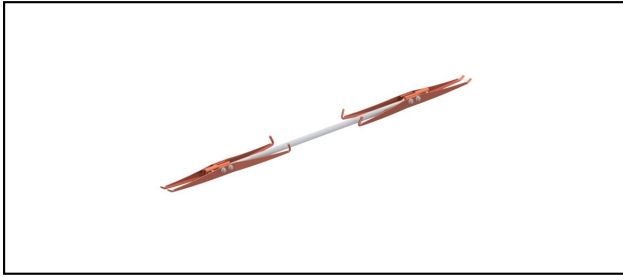


## Up to 3 kV

■ **LTN3** Neutral section**Application**

Neutral section to separate different electrical phases or systems  
For tramway and light rail  
Maximum speed up to 60 km/h

**Characteristics**

Suspension is not necessary (optionally available)

**Material**

GRP/PTFE, Cu, CuNiSi, stainless steel

**Legend**

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.054	1143	1495	800	2050	320	2x12		7.8	2

**Accessories**

**Suspension for LT1 625.000.001**

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **Neutral section LTN3**

Article No.	655.266.054
<b>Contact wire section</b>	80 - 150 mm <sup>2</sup>
<b>Contact wire groove</b>	5.6 mm
<b>Creeping distance</b>	1143 mm
<b>Length between contact wire</b>	1495 mm
<b>Arcing horn distance</b>	800 mm
<b>Total length</b>	2050 mm
<b>Width between suspension</b>	320 mm
<b>Recommended service load</b>	2x12
<b>Specified mechanical load (SML)</b>	80 kN
<b>comment</b>	2
Commercial specification	
<b>Customs number</b>	0
<b>country of origin</b>	undefined
Texte	
<b>comment</b>	2
Logistic specification	
<b>Kilo / piece</b>	7.8 kg

