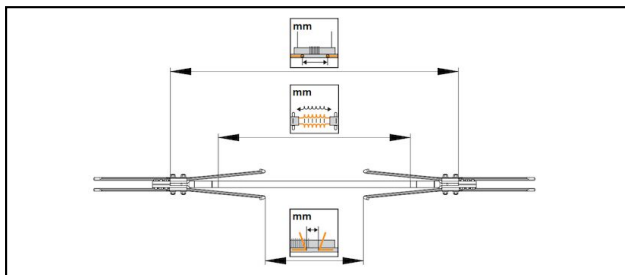
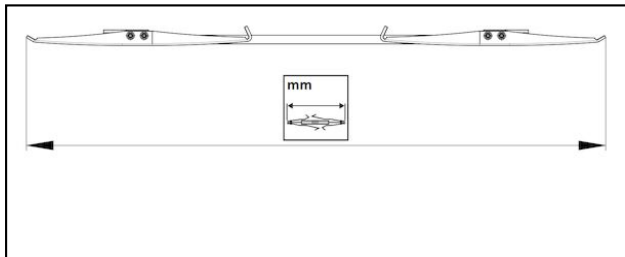


Up to 3 kV

■ LTN3

**Application**

Neutral section to separate different electrical phases or systems
For tramway and light rail
Maximum speed up to 60 km/h

Characteristics









Suspension is not necessary (optionally available)

Material

GRP/PTFE, Cu, CuNiSi, stainless steel



Legend

- 1) For 1 contact wire system
- 2) For 2 contact wire system

Article-Nr.									
655.266.050	700	1050	357	1610	320	max.24		5.8	1
655.266.053	1143	1494	800	2050	320	max.24		6.4	1
655.266.054	1143	1495	800	2050	320	2x12		7.8	2
655.266.055	955	1305	610	1864	320	max.24		6.2	1

Accessories

Suspension for LT1 625.000.001

Article-Nr.									
625.000.001								0.43	

Technical Specifications: **LTN3**

	655.266.050	655.266.053	655.266.054	655.266.055
Contact wire section	80 - 150 mm ²			120 - 177 mm ²
Contact wire groove	5.6 mm			6.9 mm
Creeping distance	700 mm	1143 mm		955 mm
Length between contact wire	1050 mm	1494 mm	1495 mm	1305 mm
Arcing horn distance	357 mm	800 mm		610 mm
Total length	1610 mm	2050 mm		1864 mm
Width between suspension	320 mm			
Recommended service load	max.24 kN		2x12 kN	max.24 kN
Specified mechanical load (SML)	80 kN			
Commercial specification				
Customs number	0	85353000	0	85353000
country of origin	ZA*	CH	ZA*	CH
Logistic specification				
Kilo / piece	5.8 kg	6.4 kg	7.8 kg	6.2 kg

