


### Cable droppers

■ **SHTF1/10V Spc.** Non- current feeding, adjustable

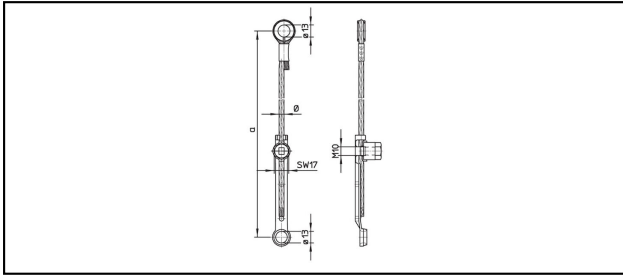

**Application**

For cable droppers, non-current feeding

**Characteristics**

Other lengths on request

**Material**

Adjustable part CuNiSi / Wire Bz 2 / Thimble Cu

| Article-Nr. | mm<br> ← a → | mm<br>Ø | mm <sup>2</sup> | kN  |  |  |  |  | Kg   |
|-------------|--------------|---------|-----------------|-----|--|--|--|--|------|
| 625.225.632 | 170 - 2120   | 4.5     | 10              | 1.3 |  |  |  |  | 0.33 |

Technical Specifications: **Non- current feeding, adjustable SHTF1/10V Spc.**

|                              |                    |
|------------------------------|--------------------|
| Article No.                  | 625.225.632        |
| <b>Length a</b>              | 170 - 2120 mm      |
| <b>Dropper wire diameter</b> | 4.5 mm             |
| <b>Dropper wire section</b>  | 10 mm <sup>2</sup> |
| <b>Slipping force</b>        | 1.3 kN             |
| Commercial specification     |                    |
| <b>Customs number</b>        | 85359000           |
| <b>country of origin</b>     | CH                 |
| Logistic specification       |                    |
| <b>Kilo / piece</b>          | 0.33 kg            |

