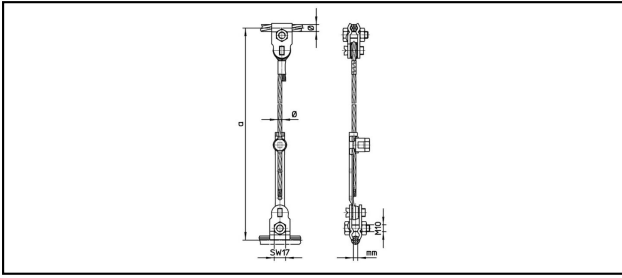


Cable droppers

■ **SHTF1,2/10V** Non- current feeding, adjustable



Application









For cable droppers, non-current feeding

Characteristics

Other lengths and contact wire grooves on request

Material

Clamp and adjustable part CuNiSi / Wire Bz 2

Article-Nr.									
625.122.582	12.5 - 17.5	95 - 185	3.75 - 8.5	250 - 1600	4.5	10	1.3		0.554



Technical Specifications: **Non- current feeding, adjustable SHTF1,2/10V**

Article No.	625.122.582
Length a	250 - 1600 mm
Catenary wire diameter	12.5 - 17.5 mm
Catenary wire section	95 - 185 mm ²
Contact wire groove	3.75 - 8.5 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm ²
Slipping force	1.3 kN
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.554 kg

