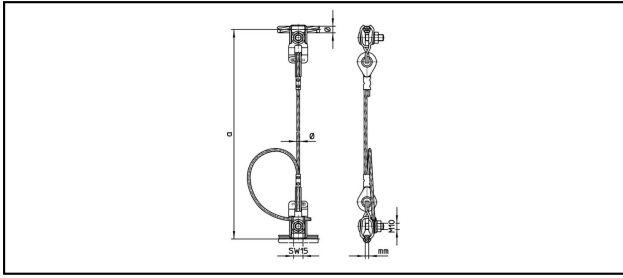


Cable droppers

■ **SHTF5,2/10V** Non- current feeding, adjustable



Application









Suspension for contact wire, non-current feeding

Characteristics

Other length and contact wire groove on request

Material

Clamp CuNiSi / stainless steel / Cable Bz 2 / Thimble plastics

| Article-Nr. |  |  |  |  |  |  |  |  |
|-------------|---|---|---|---|---|---|---|---|
| 625.590.100 | 9 - 13 | 50 - 95 | 5.5 - 7 | 4.5 | 10 | 3 | 300 - 2800 | 0.392 |

Technical Specifications: **Non- current feeding, adjustable SHTF5,2/10V**

| | |
|-------------------------------|-------------------------|
| Article No. | 625.590.100 |
| Catenary wire diameter | 9 - 13 mm |
| Catenary wire section | 50 - 95 mm ² |
| Contact wire groove | 5.5 - 7 mm |
| Dropper wire diameter | 4.5 mm |
| Dropper wire section | 10 mm ² |
| Slipping force | 3 kN |
| Length a | 300 - 2800 mm |
| Commercial specification | |
| Customs number | 0 |
| country of origin | undefined |
| Logistic specification | |
| Kilo / piece | 0.392 kg |

