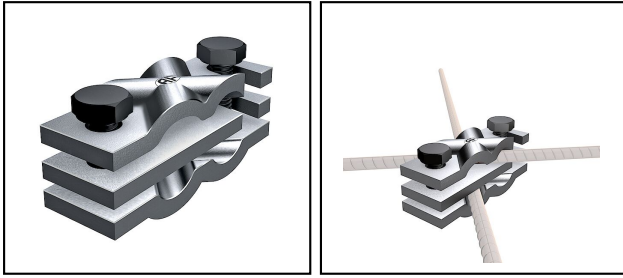









## Foundation earthing components

### ■ FE 44 Parallel and cross connector



Article-Nr.	E-Number									
281.097.000	156 940 150			St	M10x60	6 - 22	30x3			25
281.107.000	156 940 580			St	M10x100	6 - 26	30x3			25
281.098.000	156 940 160			St	M10x60	6 - 22	50x3			25
281.098.010	156 940 760			St	M10x100	6 - 26	50x3			15
280.000.001	156 940 280	H	ok	InoxA4	M10x60	6 - 22	30x3			25
280.000.003	156 940 790	H	ok	InoxA4	M10x60	6 - 22	50x3			25

Technical Specifications: **Parallel and cross connector FE 44**

	281.097.000	281.107.000	281.098.000	281.098.010
<b>Approved class H / N (EN 62561-1)</b>				
<b>Suitable for use in soil</b>				
<b>Material</b>	St			
<b>Screw</b>	M10x60	M10x100	M10x60	M10x100
<b>Wire diameter</b>	6 - 22 mm	6 - 26 mm	6 - 22 mm	6 - 26 mm
<b>Band size</b>	30x3 mm		50x3 mm	
<b>Type of fastening screws</b>	Hexagon screw			
<b>Surface protection</b>	unbehandelt			
<b>Type of connector</b>	Access-clip			
<b>Suitable for diameter round conductor</b>	6 - 22 mm	6 - 26 mm	6 - 22 mm	6 - 26 mm
<b>required torque</b>	25 N·m			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			85359000
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	6.685 kg	11.7 kg	17.4 kg	18.5 kg

	280.000.001		280.000.003	
<b>Approved class H / N (EN 62561-1)</b>	H			
<b>Suitable for use in soil</b>	ok			
<b>Material</b>	InoxA4			
<b>Screw</b>	M10x60			
<b>Wire diameter</b>	6 - 22 mm			
<b>Band size</b>	30x3 mm		50x3 mm	
<b>Type of fastening screws</b>	Hexagon screw			
<b>Surface protection</b>	unbehandelt			
<b>Type of connector</b>	Access-clip			
<b>Suitable for diameter round conductor</b>	6 - 22 mm			
<b>required torque</b>	25 N·m			
<b>Commercial specification</b>				
<b>Customs number</b>	85389000			
<b>country of origin</b>	CH			
<b>Logistic specification</b>				
<b>VPE Weight</b>	10.63 kg		17.7 kg	

