
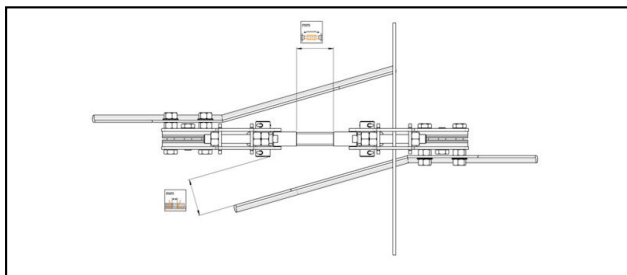


### Section insulators

**ZT1** Section insulator

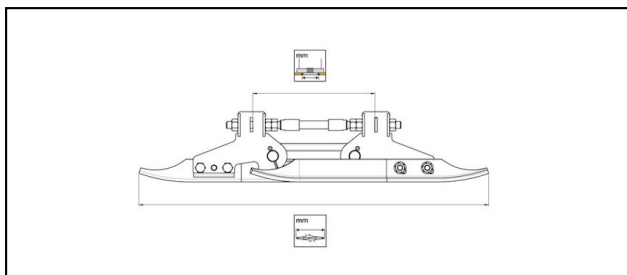

**Application**

For tramway and light rail  
Maximum speed up to 80 km/h

**Material**

GRP/silicone, Cu, CuNiSi, stainless steel

**Legend**

- 1) With suspension
- 2) Without suspension

<b>Article-Nr.</b>										
655.455.100	80 - 150	5.6 - 8.5	100	320	280	50	615	6 - 12	1	

**Accessories**



MH ZT1

<b>Article-Nr.</b>									
655.455.001									2.06

**Accessories**






<b>Article-Nr.</b>									
625.000.005									0.2



## Accessories



 SAL

Article-Nr.		mm 							Kg 
696.016.010	Al	1610							1.2

## Accessories





Turnbuckle SSCH110-135

Article-Nr.	mm 								Kg 
695.002.671	110 - 135								0.192

## Accessories








Turnbuckle SSCH95-125

Article-Nr.	mm 								Kg 
695.001.670	95 - 125								0.139

## Accessories



Turnbuckle SSCH200-280

Article-Nr.	mm 	mm 	mm 					Kg 	
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Technical Specifications: **Section insulator ZT1**

Article No.	655.455.100
Contact wire section Cu	80 - 150 mm <sup>2</sup>
Contact wire groove	5.6 - 8.5 mm
Creeping distance	100 mm
Width between suspension	320 mm
Length between contact wire	280 mm
Arcing horn distance	50 mm
Total length	615 mm
Recommended service load	6 - 12 kN
Minimum breaking load of the section insulator	50 kN
<b>comment</b>	1
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
<b>comment</b>	1
Logistic specification	
Kilo / piece	4 kg

